


屋内照明器具特性




品名	DD-3067-N		
光源	PowerLED 7.9W		
光束	581 Lm	灯数	1 灯



配光曲線図

cd/1000lm

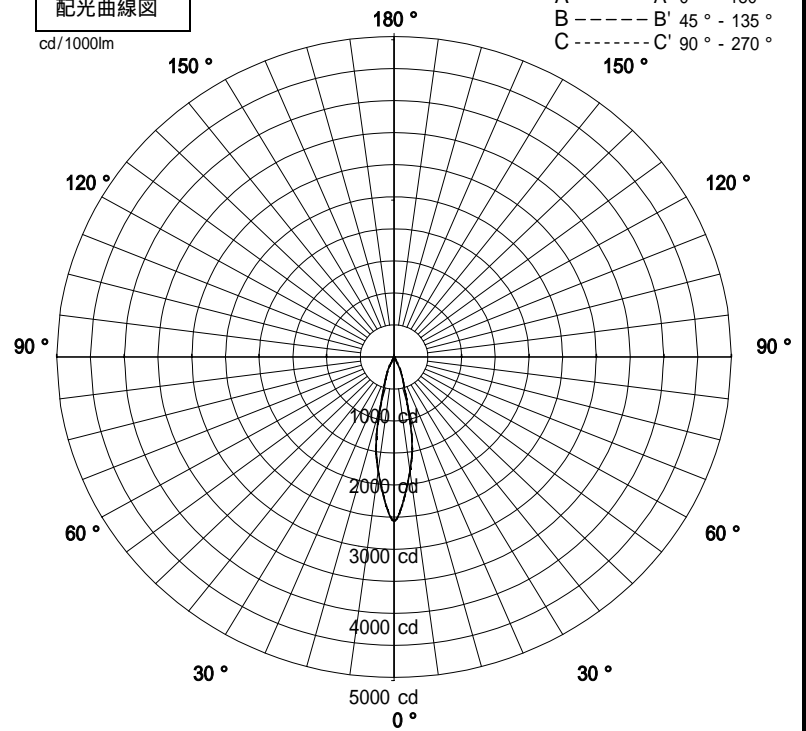


1/2照度角

直射水平面照度

単位:Lx

器具効率	50.7	%
上方効率	0.0	%
下方効率	50.7	%
保守率	良	-
	中	0.7
	否	-
1/2照度角		
A - A'	22.5	Deg
C - C'	22.5	Deg
最大取付間隔		
A - A'	0.40	H
C - C'	0.40	H

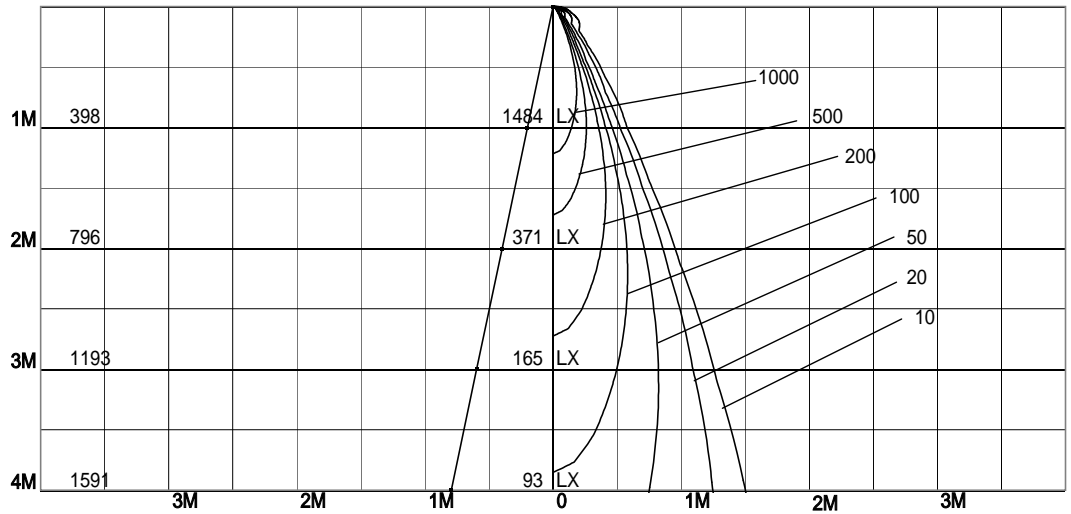

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																0%
床	10%																0%
0.60	35	32	31	30	34	32	31	30	34	32	31	30	33	32	31	30	29
0.80	36	34	33	32	36	34	33	32	36	34	33	32	35	33	32	32	31
1.00	38	36	35	34	38	36	35	34	37	36	34	34	36	35	34	33	33
1.25	39	38	36	35	39	37	36	35	38	37	36	35	37	36	36	35	34
1.50	40	39	37	37	40	38	37	36	39	38	37	36	38	37	37	36	35
2.00	41	40	39	39	41	40	39	38	40	39	39	38	39	39	38	38	37
2.50	42	41	41	40	42	41	40	40	41	40	40	39	40	40	39	39	38
3.00	43	42	41	41	42	42	41	41	41	41	41	40	41	40	40	40	39
4.00	43	43	42	42	43	42	42	42	42	42	41	41	41	41	41	41	40
5.00	43	43	43	43	43	43	42	42	42	42	42	42	41	41	41	41	40
7.00	44	44	43	43	43	43	43	43	42	42	42	42	42	42	42	42	41
10.00	44	44	44	44	43	43	43	43	43	43	43	43	42	42	42	42	41