


屋内照明器具特性




品名	FD-4162-L+KF-4084		
光源	LDA8L-G-K/60W×3		
実効光束 (器具光束)	2395lm	効率	102.3lm/W

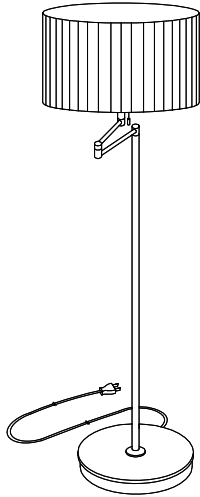

配光曲線図

実光度

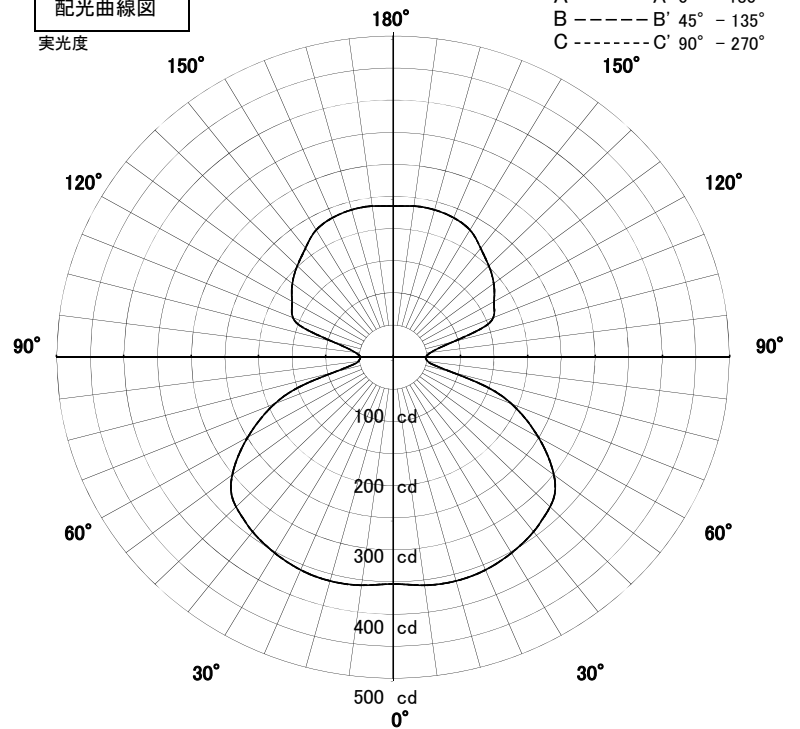


1/2照度角

直射水平面照度

単位: Lx

色温度	2700K	
演色評価指数	Ra80	
保守率	良	0.67
	中	0.63
	否	0.56

1/2照度角		
A-A'	73.5	Deg
C-C'	73.5	Deg
最大取付間隔		
A-A'	1.49	H
C-C'	1.49	H

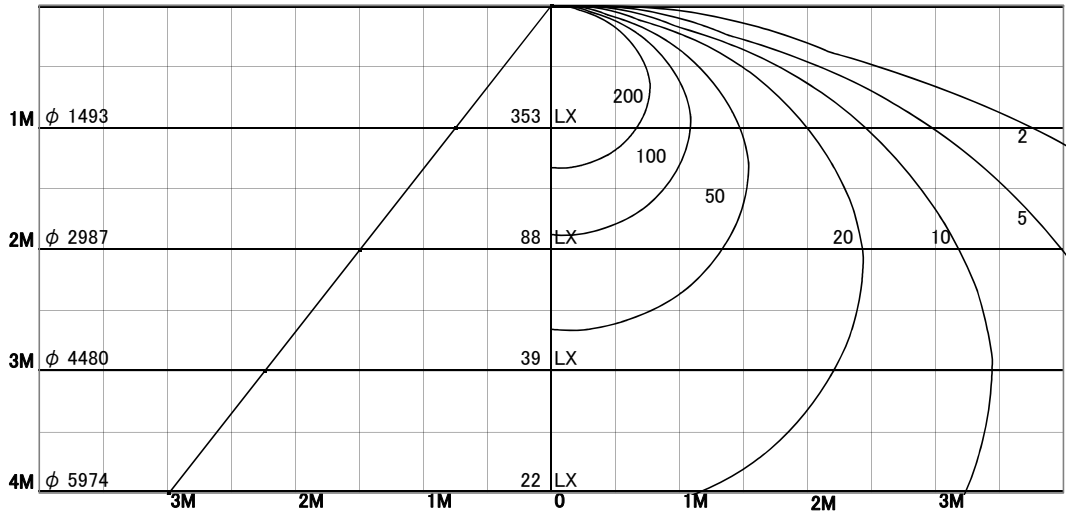

照明率表

	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
天井	10%																0%
壁	10%																0%
床	10%																0%
0.60	32	24	19	16	31	24	19	16	29	23	19	16	28	22	18	16	14
0.80	37	30	25	21	36	29	24	21	34	28	24	21	33	28	24	21	19
1.00	41	34	29	26	40	34	29	25	38	33	29	25	37	32	28	25	24
1.25	45	39	34	30	44	38	34	30	42	37	33	30	40	36	32	29	28
1.50	48	42	37	34	47	41	37	34	45	40	36	33	43	39	36	33	31
2.00	51	47	43	39	50	46	42	39	48	45	42	39	47	43	41	38	37
2.50	54	50	46	43	53	49	46	43	51	48	45	43	49	46	44	42	40
3.00	55	52	49	46	54	51	48	46	53	50	47	45	51	49	46	45	43
4.00	57	55	52	50	56	54	52	49	55	53	51	49	53	51	50	48	46
5.00	59	56	54	52	58	56	54	52	56	54	52	51	54	53	51	50	48
7.00	60	58	57	55	59	58	56	55	58	56	55	54	56	55	54	53	51
10.00	61	60	59	57	60	59	58	57	59	58	57	56	57	56	56	55	53