


屋内照明器具特性




品名	FD-4162-L+KF-4085		
光源	LDA8L-G-K/60W×3		
実効光束 (器具光束)	1909lm	効率	81.6lm/W

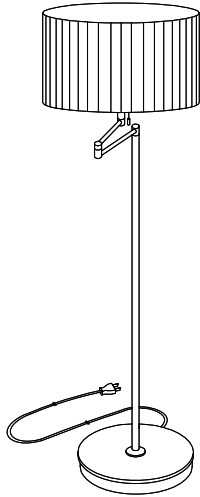

配光曲線図

実光度

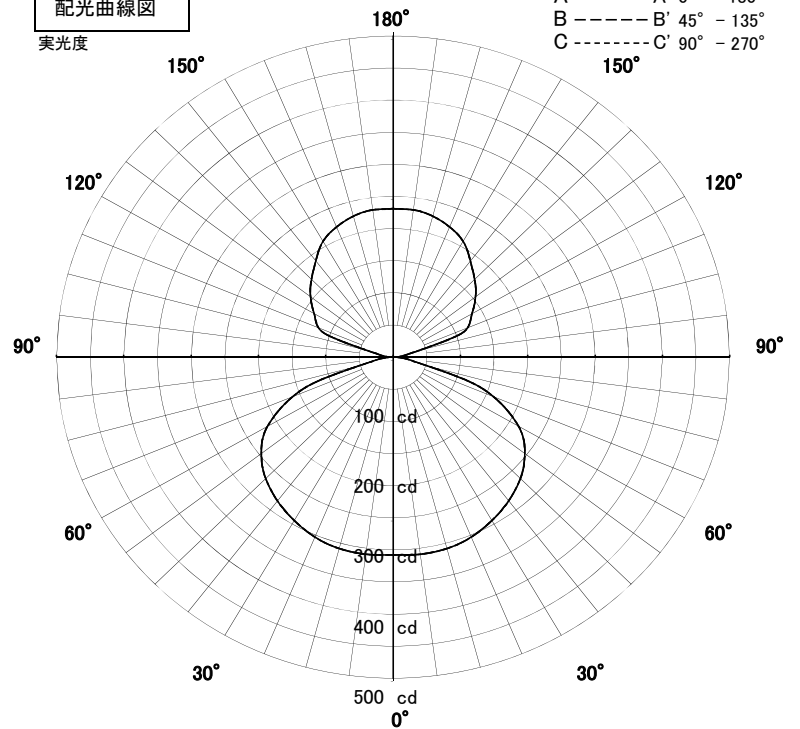


1/2照度角

直射水平面照度

単位:Lx

色温度	2700K	
演色評価指数	Ra80	
保守率	良	0.67
	中	0.63
	否	0.56

1/2照度角		
A-A'	71.0	Deg
C-C'	71.0	Deg
最大取付間隔		
A-A'	1.43	H
C-C'	1.43	H

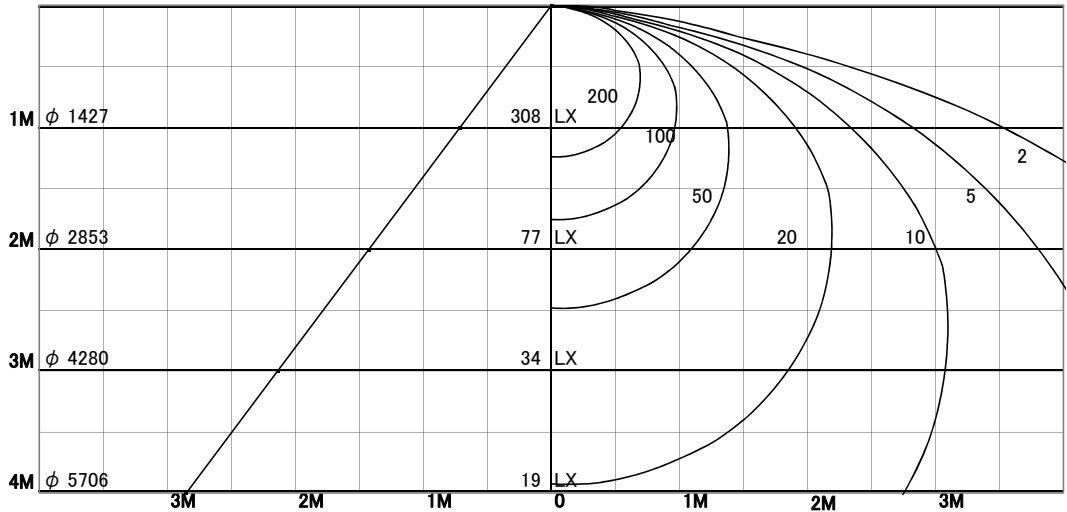

照明率表

	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
天井	10%																0%
壁	10%																0%
床	10%																0%
0.60	32	25	20	17	32	24	20	17	30	24	20	16	29	23	19	16	15
0.80	38	31	26	22	37	30	25	22	35	29	25	22	34	28	25	22	20
1.00	42	35	30	27	41	35	30	27	39	34	30	26	38	33	29	26	25
1.25	46	40	35	31	45	39	35	31	43	38	34	31	41	37	34	31	29
1.50	49	43	39	35	48	42	38	35	46	41	38	35	44	40	37	34	33
2.00	52	48	44	41	51	47	44	41	50	46	43	40	48	45	42	40	38
2.50	55	51	48	45	54	50	47	45	52	49	46	44	50	48	46	44	42
3.00	56	53	50	48	56	53	50	48	54	51	49	47	52	50	48	46	45
4.00	58	56	54	52	58	55	53	51	56	54	52	51	54	53	51	50	48
5.00	60	58	56	54	59	57	55	54	57	56	54	53	56	54	53	52	50
7.00	61	60	58	57	60	59	58	56	59	58	56	55	57	56	55	55	53
10.00	62	61	60	59	61	60	59	59	60	59	58	57	58	58	57	56	55