


# 屋内照明器具特性




品名	TD-4137-L		
光源	LDA5L-G-E17/S/40W×2灯		
実効光束 (器具光束)	752lm	効率	72.3lm/W



配光曲線図

実光度

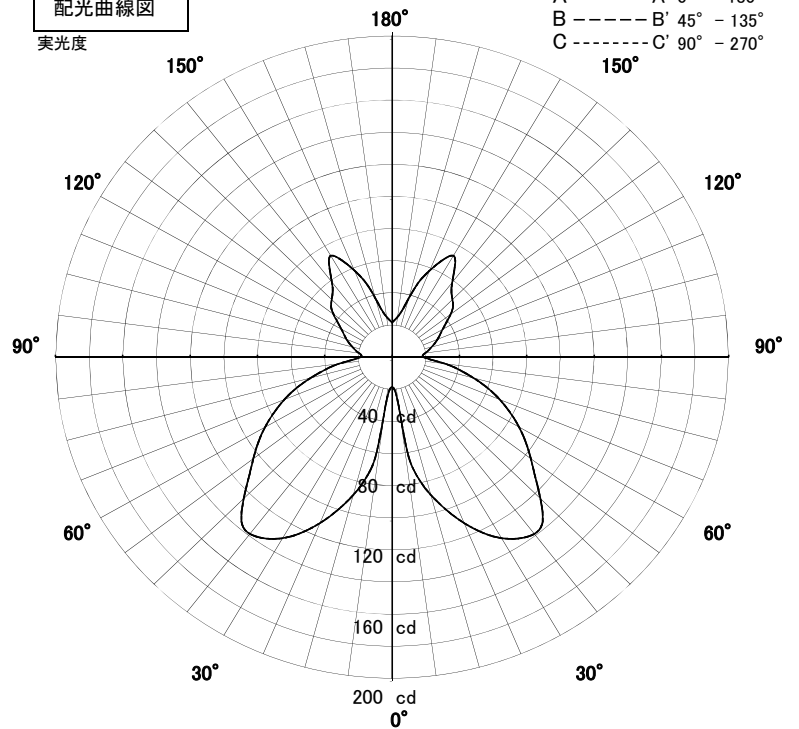


1/2照度角

直射水平面照度

単位: Lx

色温度	2700K	
演色評価指数	Ra80	
保守率	良	0.67
	中	0.63
	否	0.56

1/2照度角		
A-A'	122.5	Deg
C-C'	122.5	Deg
最大取付間隔		
A-A'	3.65	H
C-C'	3.65	H

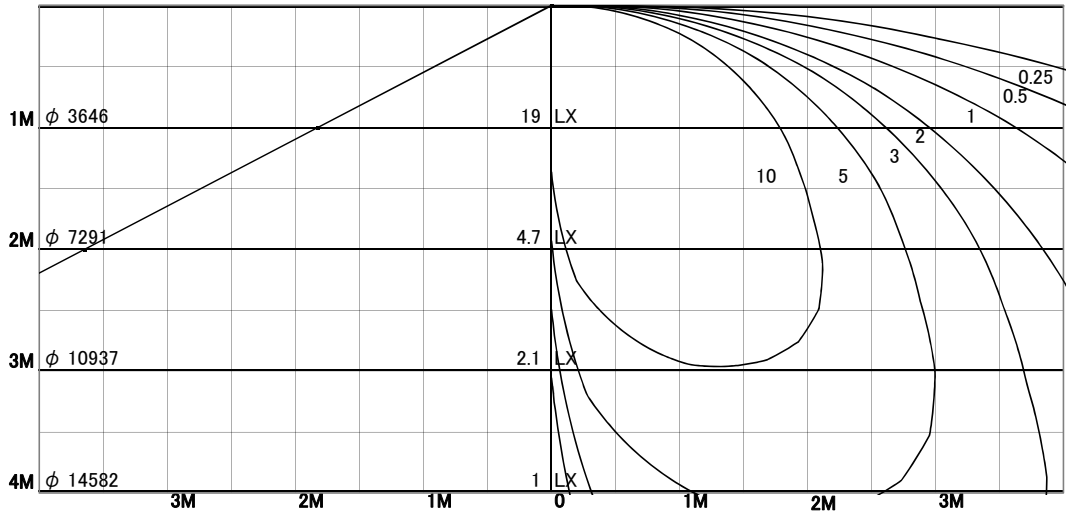

照明率表

	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
天井	10%																0%
壁	10%																0%
床	10%																0%
0.60	36	27	21	17	35	26	21	17	33	26	20	17	32	25	20	17	15
0.80	42	33	27	23	41	33	27	23	39	32	27	23	37	31	26	22	21
1.00	47	39	32	28	46	38	32	28	43	37	32	28	41	36	31	27	26
1.25	51	44	38	33	50	43	37	33	48	41	37	33	46	40	36	32	31
1.50	54	47	42	37	53	47	41	37	51	45	41	37	49	44	40	36	35
2.00	59	53	48	44	58	52	48	44	55	51	47	43	53	49	46	43	41
2.50	62	56	52	48	60	56	52	48	58	54	51	48	56	53	50	47	45
3.00	64	59	55	52	62	58	55	51	60	57	53	51	58	55	52	50	48
4.00	66	62	59	56	65	61	58	56	63	60	57	55	61	58	56	54	52
5.00	67	64	62	59	66	64	61	59	64	62	60	58	62	60	58	57	55
7.00	69	67	65	63	68	66	64	62	66	64	63	61	64	63	61	60	58
10.00	71	69	67	66	70	68	66	65	68	66	65	64	66	65	64	63	60