



屋内照明器具特性



品名	TD-4145-L		
光源	No.292AL		
実効光束 (器具光束)	421lm	効率	95.6lm/W

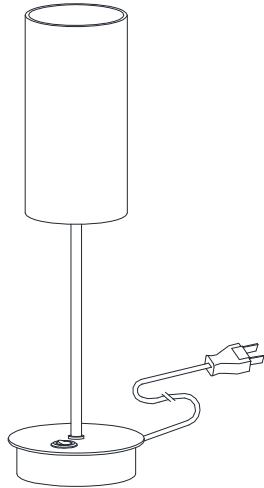

配光曲線図
実光度

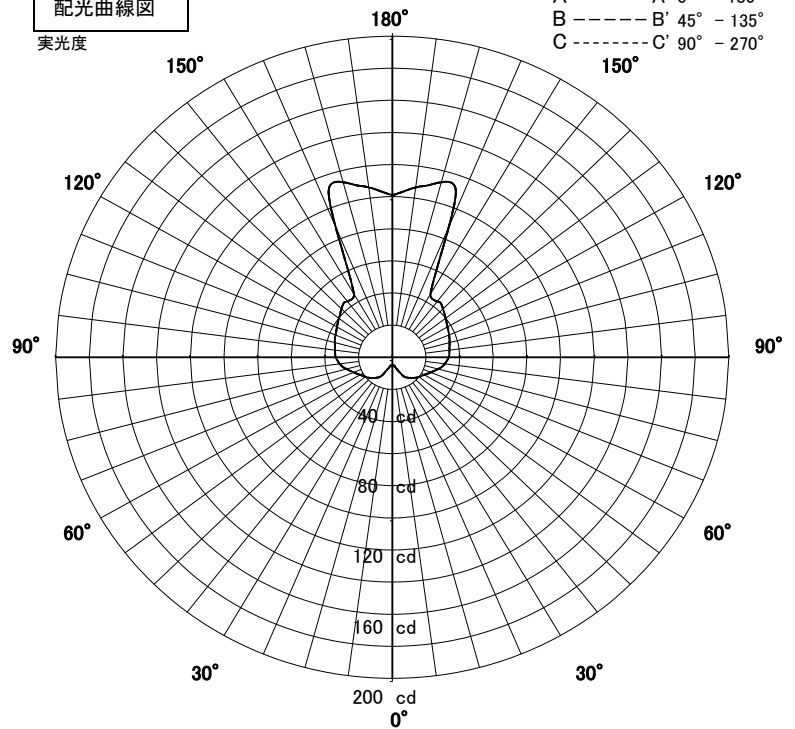


1/2照度角

直射水平面照度

単位: Lx

色温度	2700K	
演色評価指数	Ra94	
保守率	良	0.67
	中	0.63
	否	0.56

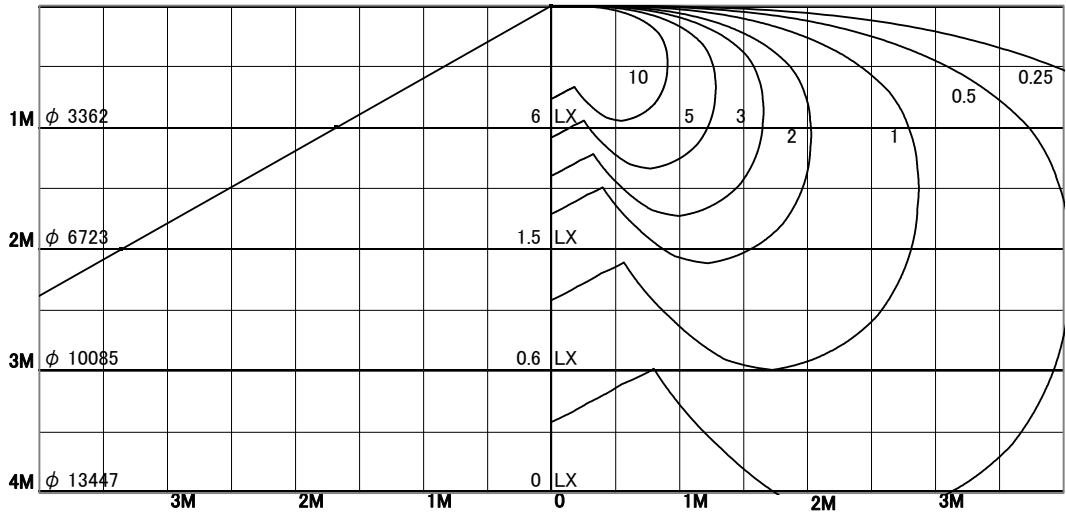

1/2照度角		
A-A'	118.5	Deg
C-C'	118.5	Deg
最大取付間隔		
A-A'	3.36	H
C-C'	3.36	H

照明率表

	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
天井	10%																0%
壁	10%																0%
床	10%																0%
0.60	14	9	6	4	14	9	6	4	13	8	6	3	12	8	5	3	3
0.80	17	11	8	5	16	11	8	5	15	11	7	5	14	10	7	5	4
1.00	19	13	10	7	18	13	10	7	17	12	9	7	15	12	9	7	6
1.25	21	15	12	9	20	15	11	9	18	14	11	9	17	14	11	8	7
1.50	22	17	13	10	21	17	13	10	20	16	13	10	18	15	12	10	9
2.00	24	20	16	13	23	19	16	13	22	18	15	13	20	17	15	13	11
2.50	26	22	18	15	25	21	18	15	23	20	17	15	22	19	17	15	13
3.00	27	23	20	17	26	22	20	17	24	21	19	17	23	21	18	16	15
4.00	28	25	22	20	28	25	22	19	26	23	21	19	25	23	21	19	18
5.00	29	26	24	22	29	26	24	21	27	25	23	21	26	24	22	20	19
7.00	31	28	26	24	30	28	26	24	29	27	25	23	27	26	24	23	22
10.00	32	30	28	26	31	29	28	26	30	28	27	26	29	27	26	25	24