


屋内照明器具特性



品名	TD-4252-L		
光源	LED2.4W		
実効光束 (器具光束)	29lm	効率	12.lm/W



配光曲線図

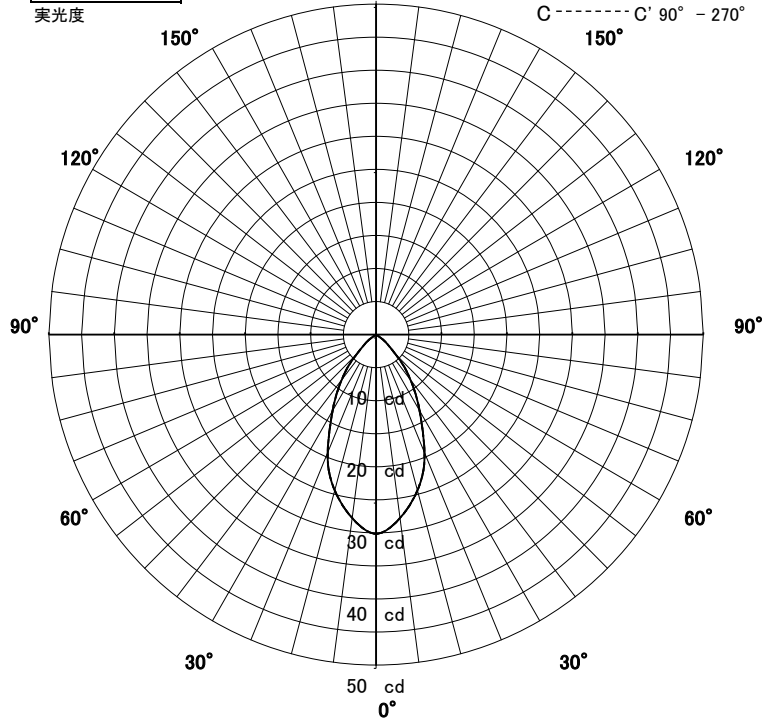


1/2照度角

直射水平面照度

単位:Lx

色温度	3000K	
演色評価指数	Ra80	
保守率	良	0.63
	中	0.6
	否	0.56

1/2照度角		
A-A'	46.0	Deg
C-C'	46.0	Deg
最大取付間隔		
A-A'	0.85	H
C-C'	0.85	H

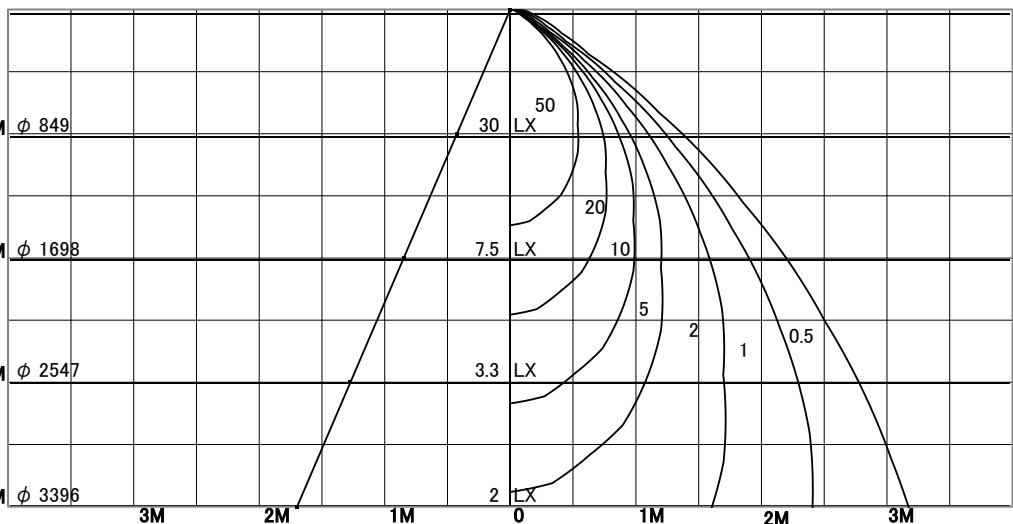

照明率表

	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
天井																	
壁																	
床																	
0.60	77	70	65	61	76	69	65	61	75	68	64	61	73	68	64	61	60
0.80	84	77	72	69	83	76	72	69	81	75	71	68	79	74	71	68	67
1.00	89	83	78	75	88	82	78	75	86	81	77	75	84	80	77	74	73
1.25	93	88	84	81	92	87	83	80	90	86	83	80	88	85	82	79	78
1.50	96	91	88	85	95	90	87	84	93	89	86	84	91	88	85	83	81
2.00	100	96	93	91	99	95	93	91	97	94	92	90	95	92	90	89	87
2.50	102	99	97	95	101	98	96	94	99	97	95	93	97	95	94	92	90
3.00	103	101	99	98	102	100	99	97	100	99	97	96	98	97	96	95	93
4.00	105	103	102	100	104	102	101	100	102	100	99	98	100	99	98	97	95
5.00	106	104	103	102	104	103	102	101	102	101	101	100	100	100	99	98	96
7.00	106	106	105	104	105	105	104	103	103	103	102	101	101	101	100	100	97
10.00	107	106	106	105	106	105	105	104	104	103	103	103	102	101	101	101	98